



DESCRIPTION

Boxed, double pole, 24v (nominal) change over relay switch suitable for a variety of low voltage, mains control and signalling purposes.

The coil is polarised and suppressed and may be used on monitored circuits.

Available in red or white



FEATURES

- 8 amp double pole relay
- Suitable for mains switching
- Individually fused outputs
- Red LED to indicate relay activated
- Can be surface or flush fitted
- Supplied complete with back box


PRODUCT CODES

BRF248A-R	Red boxed relay
BRF248-W	White boxed relay

INSTALLATION INSTRUCTIONS

The relay switch may be surface or flush mounted using the provided back box. Standard, single gang mounting boxes may also be used.

Holes for conduit, glands or mini trunking should be drilled as required. A 20mm rear access hole is provided plus BESA box fixing holes. Remove lid prior to drilling holes to avoid circuit damage.

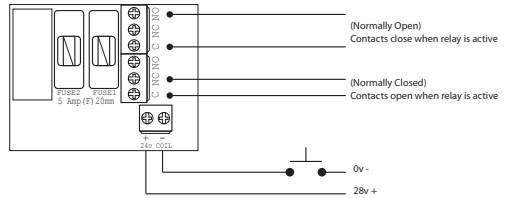

TECHNICAL INFORMATION

OPERATING VOLTAGE	24v dc (nominal)
CONTACT RATING	250v ac 8A
FUSE	5 amp, 20mm quick blow (F)
ENCLOSURE	ROHS compliant FR ABS

